

Import®



Approvals/Listings

- G.S.A. Spec FF-S-325C, Group II, Type 2, Class 2, Style 1 (Single)
- G.S.A. Spec FF-S-325C, Group II, Type 2, Class 2, Style 2 (Double)

Available Materials

- Diecast zinc alloy

Features/Advantages

- Medium loads under dead, variable or vibratory conditions in all types of solid masonry
- Available in single version (1 expander nut) or double version (2 expander nuts)



Order Detail

Order Code	Bolt Dia.	Hole Dia.	Shield Length	Ultimate Loads in Lbs. 3000 P.S.I.			
				Tension	Shear	Box Quantity	Master Quantity
Single							
6104000	1/4"	1/2"	1 5/16"	2,410	1,750	100	800
6105000	5/16"	5/8"	1 1/2"	2,620	2,400	50	400
6106000	3/8"	5/8"	1 1/2"	4,950	3,180	50	400
6108000	1/2"	7/8"	2 3/16"	7,550	6,500	50	150


Order Detail

Order Code	Bolt Dia.	Hole Dia.	Shield Length	Ultimate Loads in Lbs. 3000 P.S.I.			
				Tension	Shear	Box Quantity	Master Quantity
Double							
6204000	1/4"	1/2"	1 3/8"	2,820	2,250	100	800
6205000	5/16"	5/8"	1 3/16"	2,990	2,740	100	500
6206000	3/8"	3/4"	2 1/16"	5,995	3,610	50	250
6208000	1/2"	7/8"	2 1/2"	9,140	7,345	25	125
6210000	5/8"	1"	3"	12,050	10,700	50	100
*6212000	3/4"	1 1/4"	4"	14,500	14,500	25	50

*Discontinued products subject to availability

Installation

- 1 Drill recommended diameter hole to depth of shield.
- 2 Clean hole of debris.
- 3 Insert shield in hole threaded end first and tap with hammer for proper positioning.
- 4 Place equipment over shield. Insert machine bolt through equipment into shield and tighten.

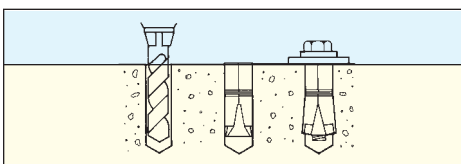

Contact Hurripanel Fasteners for a Quote
1.972.417.8882 • www.hurripanel.com

