

Sup-R-Shorty® & Lipped Sup-R-Drop®



Features/Advantages

- Lip ensures proper anchor setting even in hollow based material.
- Female threads accept standard UNC bolts or threaded rods.




Order Detail

Order Code C-Steel	Order Code 304 Stainless	Order Code 316 Stainless	Hole Dia.	Min. Embed.	Max Torque (ft. lbs.)	UNC Bolt Size	Ultimate Tensile & Shear Loads in Lbs.		C-Steel Box Qty.	C-Steel Master Qty.	
							2000 P.S.I. Tension (lbs.)	4000 P.S.I. Tension (lbs.)			
131200L	—	—	5/8"	2"	20	1/2"	5,312	7,398	5,854	50	250
133800L	—	—	1/2"	1 9/16"	10	3/8"	3,957	4,824	3,714	50	500
13380SH	—	—	1/2"	3/4"	5	3/8"	2,083	—	3,714	100	800

Installation of Shorty Sup-R-Drop® & Lipped Sup-R-Drop®

- 1 Drill hole same length as anchor. Do not use core bits. Maintain accurate hole diameter.
- 2 Clean hole of debris.
- 3 Drop in anchor, slotted end first.
- 4 To set, drive setting tool into anchor until shoulder of tool is flush with top of anchor.
- 5 Select appropriate coil thread rod or coil bolt.

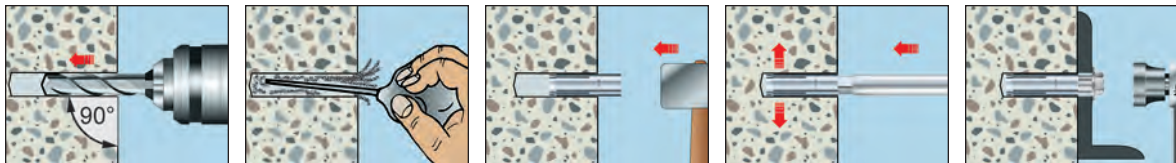

Contact Hurripanel Fasteners for a Quote
1.972.417.8882 • www.hurripanel.com